



SMART 7KT Multi Function Meter Accuracy Class 1 and inbuilt Modbus RTU Communication

Measurements	
measuring procedure	True RMS
<ul style="list-style-type: none"> for voltage measurement for current measurement 	True RMS
type of measured value detection	complete
voltage curve	Sinusoidal or distorted
measurable line frequency	
<ul style="list-style-type: none"> initial value full-scale value 	45 Hz 65 Hz
operating mode for measured value detection automatic line frequency detection	Yes
Supply voltage	
design of the power supply	SMPS power supply
type of voltage of the supply voltage	AC
Degree of protection protection class	
protection class IP on the front	IP65
protection class IP of the terminal	IP20
Suitability	
suitability for operation	Installation in stationary panels in closed rooms
Product Functions	
product function	
<ul style="list-style-type: none"> voltage measurement current measurement active power measurement reactive power measurement power factor measurement frequency measurement apparent energy/active energy/reactive energy 	Yes Yes Yes Yes Yes Yes Yes
Display and operation	
design of the display	LCD
height of the display	60 mm
width of the display	60 mm
color of the background of the display	White
illuminance of display backlight adjustable	No
time-controlled reduction of the illuminance of display backlight possible	Yes
display contrast adjustable	No
national language on the display screen is supported	EN
number of keys	4
Fault limits	
reference condition for metering accuracy	according to IEC61557-12, IEC62053-21, IEC62053-23

formula for relative total measurement accuracy	
<ul style="list-style-type: none"> • for measured variable active energy • for measured variable reactive energy 	Class 1 as per IEC 62053-21 Class 2 as per IEC 62053-23
Inputs Outputs	
number of digital inputs	1
type of electrical connection at the digital inputs	screw-type terminals
operating conditions for digital inputs external voltage supply	Yes
input voltage at digital input at DC maximum	30 V
input current at digital input initial value for signal<1>-recognition	10 mA
Measuring inputs	
measurable supply voltage between (PE)N and L at AC maximum rated value	240 V
measurable supply voltage between (PE)N and L at AC	
<ul style="list-style-type: none"> • minimum • maximum 	11 V 300 V
measurable supply voltage between the line conductors at AC maximum rated value	415 V
measurable supply voltage between the line conductors at AC	
<ul style="list-style-type: none"> • minimum • maximum 	19 V 519 V
voltage measuring range extension with external voltage transformers	Yes
line conductors and neutral conductors internal resistance for voltage measurement	112 MΩ
measuring category for voltage measurement	CAT III
measurable current	
<ul style="list-style-type: none"> • 1 at AC rated value • 2 at AC rated value 	1 A 5 A
relative measurable current at AC	
<ul style="list-style-type: none"> • minimum • maximum 	1 % 120 %
current measuring range extension with external current transformers	Yes
measuring category for current measurement	CAT III
Connections	
type of electrical connection	
<ul style="list-style-type: none"> • at the measurement inputs for voltage • at the measurement inputs for current 	screw-type terminals screw-type terminals
Mechanical Design	
fastening method standard rail mounting	No
size of Power Monitoring Device	size 96
height	96 mm
width	96 mm
depth	57 mm
installation depth	50 mm
net weight	3 600 g
mounting position	Vertical
Environmental conditions	
ambient temperature during operation	
<ul style="list-style-type: none"> • minimum • maximum 	-10 °C 55 °C
ambient temperature during storage	
<ul style="list-style-type: none"> • minimum • maximum 	-20 °C 75 °C
relative humidity at 25 °C without condensation during operation maximum	85 %
installation altitude at height above sea level maximum	2 000 m
degree of pollution	2
General Product Approval	other

Further information

Siemens has decided to exit the Russian market (see here).

<https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business>

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (catalogues, leaflets,...)

<http://www.siemens.com/energy-automation>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=7KT0310>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/7KT0310>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=7KT0310


CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

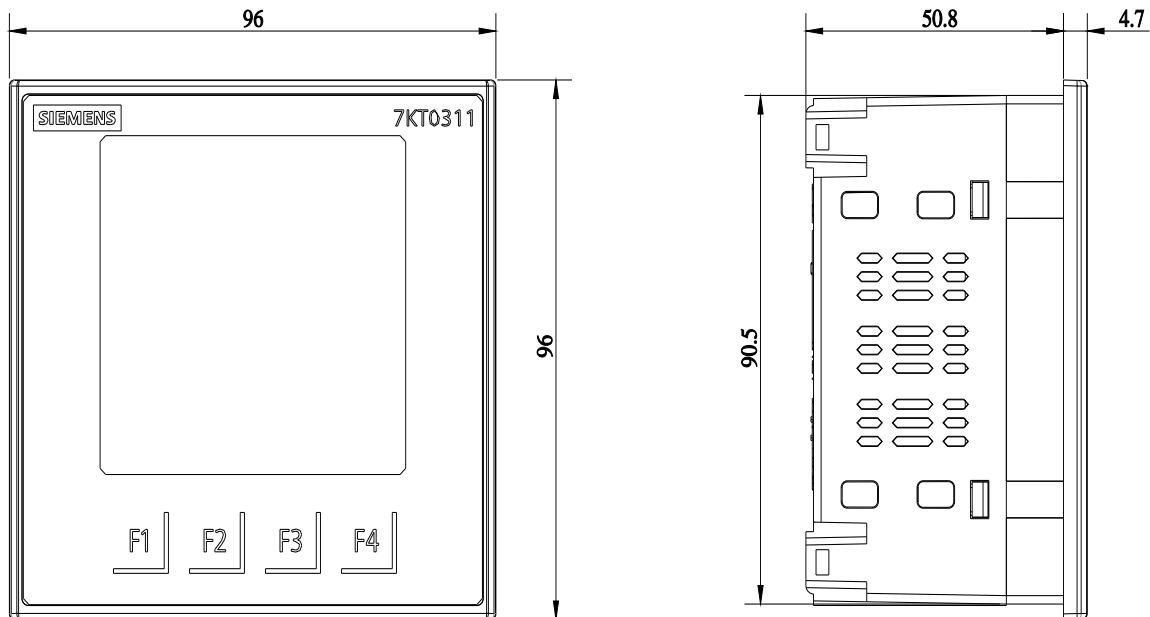

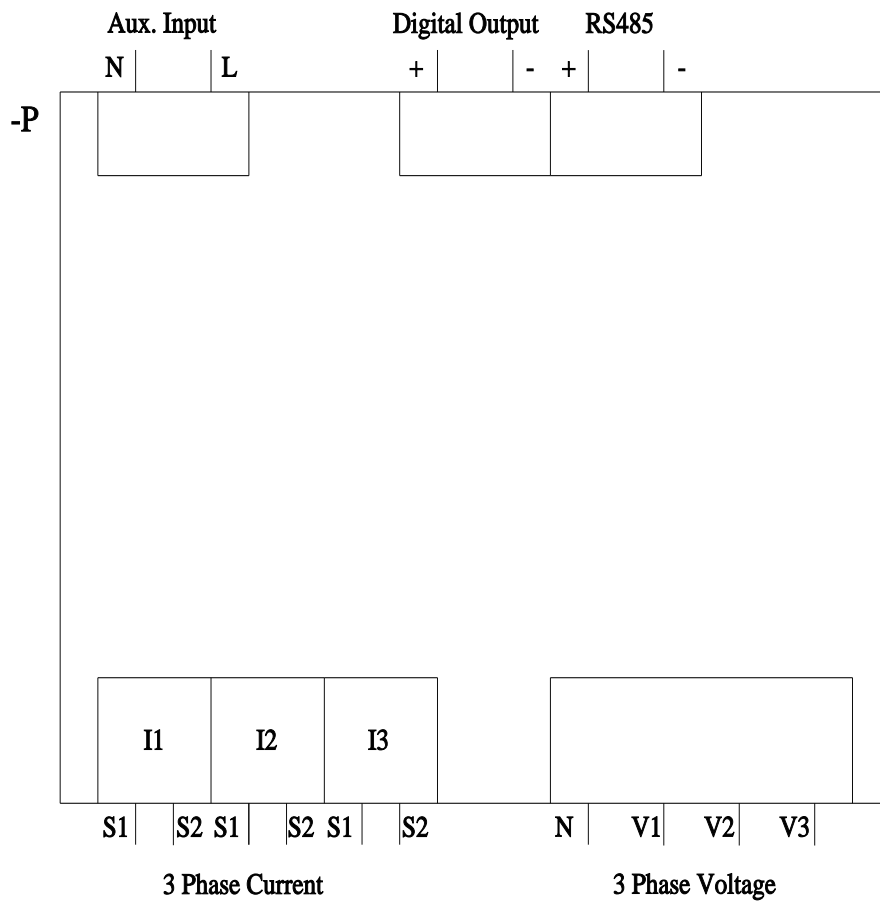

last modified:

4/27/2023 

